

Features

- 48 Channel Memory Lighting Console
- Playback stack
- Patching to 512 DMX channels
- DMX in allowing snapshots of all 512 DMX channels
- VGA Monitor Port
- USB storage and keyboard support
- MIDI Notes & Show Control
- Lock Function
- LCD Display for stand-alone use
- Online Help in multiple languages
- Offline Editor (Phantom Jester)
- Remote triggers
- Upgradeable firmware
- External power supply
- 24/48 channels of control
- 48 Submasters
- 24 Auxillary Buttons



Overview

Jester 24/48 is perfect for small to medium show lighting applications where a greater channel count is needed. With a wide range of features, intuitive operation and great value, Jester 24/48 delivers outstanding performance show after show.

The three operating modes feature control in preset, program or playback including using a traditional theatre playback stack. The Jester 24/48 is a fully functional memory console complimented with on-board LCD display and plug-in monitor port as standard.

With 24 auxiliary buttons used to trigger DMX devices such as scrollers, smoke machines or strobes, MIDI capabilities, a USB port to backup shows and even a DMX In port for snapshot/backup use, the Jester 24/48 delivers truly wide user appeal.

*Monitor not included

MIDI USB Monitor

Quality you can trust

40 Years of Lighting Passion

- | | | |
|---------------------------|------------------------------|------------------------------|
| ✓ 3 years warranty | ✓ Real people to help you | ✓ Multilingual training team |
| ✓ On-line training videos | ✓ Downloadable web resources | ✓ Support forum |
| ✓ Free software upgrades | ✓ ISO 9001:2008 Certified | |

Ordering Information

Jester 24/48: 00-109-00
Flightcase Jester 24/48: 00-767-00


Supplied Accessories

Power Supply
Operating Manual (on CD)

Specifications

- Control Channels: Up to 512
- Channel Faders: 48
- Preset Master Faders: 2
- Fade Time Controls: 1 (Split Up/Down times can be programmed)
- Sequence Speed Control: 1
- Sequence Master Fader: 1
- Grand Master Fader: 1
- Blackout Button: 1
- Flash Buttons: 48
- Midi In/Thru
- VGA Monitor Port
- Audio Input
- Remote Input
- Storage and Keyboard Connections
- Power Supply: External 100-240 Volts 50/60Hz
- DMX Output: 1 Universe
- DMX Input: 1 Universe
- DMX to USITT DMX-512 1990 Protocol
- Dimensions: 88mm(H) x 710mm(W) x 278mm(D)
- Weight: 6.5Kg (14.3lb)
- Operating environment: +5°C to +40°C
- Humidity: 5% to 95% Non condensing

Dimensions

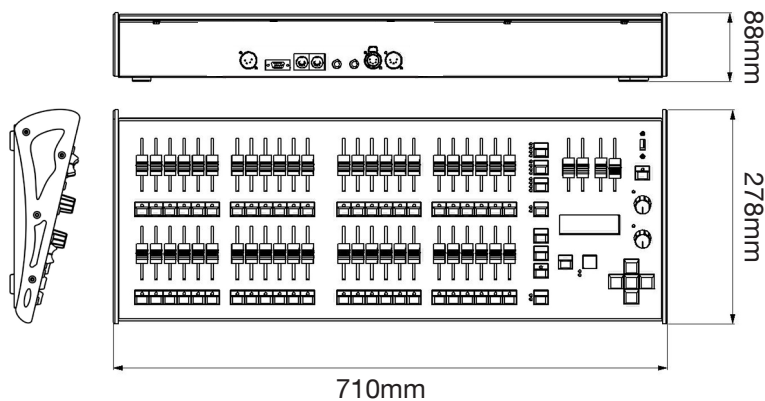

	Voltage	100V <input checked="" type="checkbox"/>	220 - 240V NON CE <input checked="" type="checkbox"/>	Standards 					
		110 - 127V <input checked="" type="checkbox"/>	277V <input type="checkbox"/>						
		230V CE <input checked="" type="checkbox"/>	347V <input type="checkbox"/>						

This product conforms to one or more of the above standards. Please contact your local Cooper Controls representative for further information.

Zero 88

Cooper Controls Ltd, Usk House, Lakeside,
Llantarnam Park, Cwmbran, Torfaen, NP44 3HD, UK.
Tel : +44 (0)1633 838088 Fax : +44 (0)1633 867880
E-mail: enquiries@zero88.com Web: www.zero88.com