


Now available with DMX and Softpatch facility

SRJUS 48

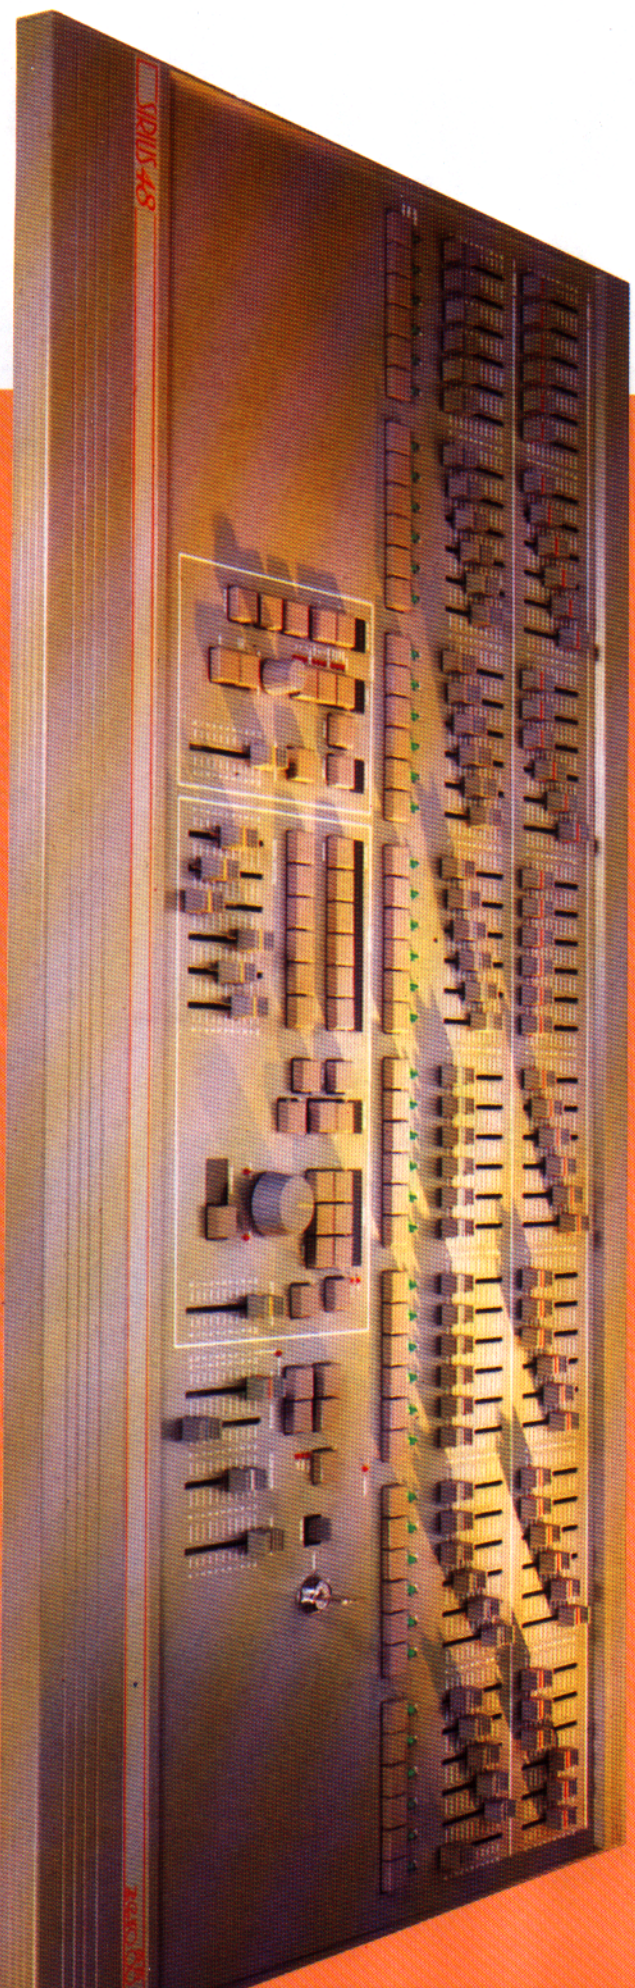

Lighting

C R E A T I V I T Y

from

ZCJO

A Touch of Brilliance

SIRIUS 48

Z E R O . 8 8 ' S . E L E

- ▶ 48 Channels
- ▶ 2 Presets
- ▶ 99 Programmable Level Memories
- ▶ 9 Level Chases
- ▶ 290 'Insert' Level Memories
- ▶ 398 Total Cues Available
- ▶ Multiple Chases
- ▶ 6 Memory Masters
- ▶ 32 kb. Memory Card
- ▶ Clic Trac
- ▶ 'GO' Button (the single action playback)

Combining sophistication with user friendliness, this elegant performer brings a whole package of advanced technology to the smaller lighting console. Sirius offers simplicity, versatility and value for money making it ideal for Theatre, Hire, Touring, Schools, Colleges and Night Clubs.




THE 'GO' BUTTON

- ▶ **Single action playback**
Each press of the 'GO' button sequentially send to output pre-recorded cues from the memory stack. Cues and chases will be replayed out of sequence using the '+', '-' buttons associated with the 'Next Memory' window.
- ▶ **Easy to use**
A complete show may be run simply using the 'GO' button.
- ▶ **'Clic Trac'**
The 'GO' button can also be remotely controlled via an external switch or a synchronous 'Clic Trac.'


LEVEL MATCH

Allows cues to be re-created from memory on Preset 'B'. These may then be modified Blind or Live.

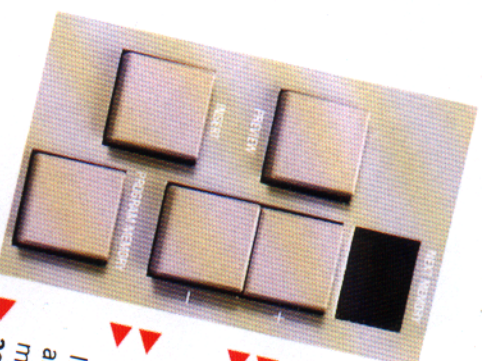

THE MEMORY STACK

- ▶ **The Heart of the Sirius**
Sirius utilises a 'Memory Stack' for recording cues with:
- ▶ **99 Basic Memories**
- ▶ **9 Basic Level Chases**
This system offers the facility for further:
- ▶ **200 Insert Memories**
In addition, all memories, both Basic and Insert, have separately programmable 'Up and Down' crossfade times.
- ▶ **398 Cues** — when using every feature

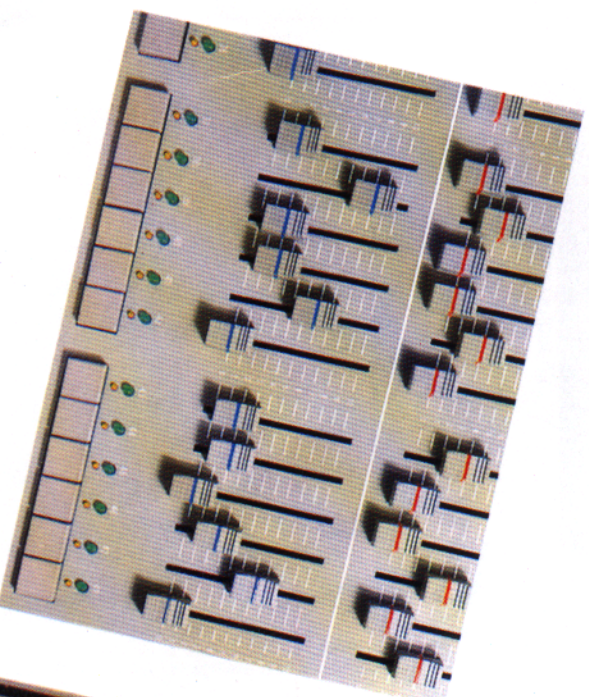


TWO

- ▶ **Hands**
Two memory masters are provided.
- ▶ **Program**
In 'Program' mode, the console is transferred to single preset memory' by



G A N T · S O L U T I O N

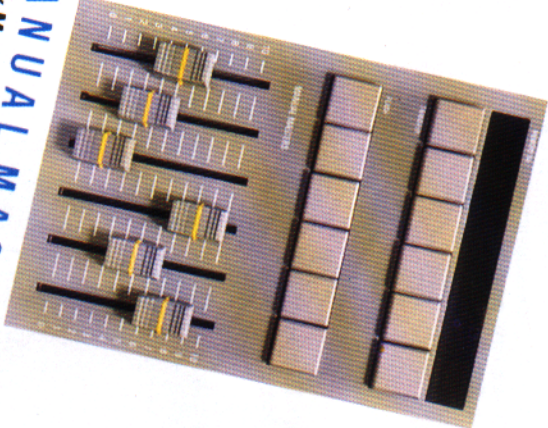


ANUAL MASTERS

Six Manual Masters
When a more flexible approach to lighting is needed any cue or chase from the Memory Stack may be transferred quickly and simply to any one of multiple cues and chases at different speeds may be run simultaneously.


PRESETS

On, Lights on
Manual presets 'A' and 'B' are available. All cues are plotted and the information is stored to memory with a button of the program.



BLIND

The 'blind' facility on Sirius enables the user to program the next cues, or modify a cue in preview, or in a 'live' situation without affecting the output on stage.



TOP SET


Preset 'A' has an alternative function of 'Top Set' control. This allows the user to reduce the overall output level of any channel, overriding all the other level controls including memory. This is particularly useful for example, for limiting a channel output when a lantern has been knocked out of place.

SUPERUSER

Enables the user to access some of the executive functions such as: Data storage; 'Click Trac'; clearing all the memories and the software version number. It is protected from accidental access.

DATA STORAGE

Memory Card
A simple and convenient accessory for backing up security and for creating a personal library of lighting plots.

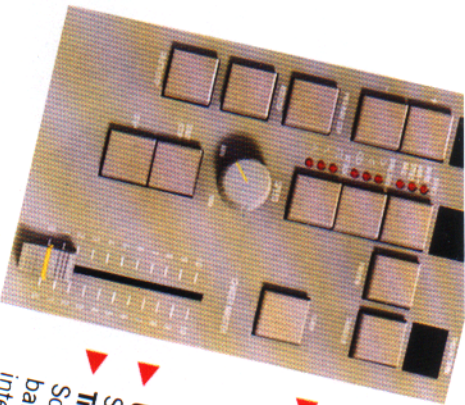

CHASER FEATURES

- ▶ **Fully Programmable**
Up to 9 different level sequences may be plotted and run 'live' from the chaser panel.
- ▶ **Transfer Chases to the Memory Stack**
Chases can be inserted between cues in the memory stack and given their own special cue number (eg. C1, C2 etc.). Cue would be a much better description of the Sirius chaser facilities.
- ▶ **Up to 200 Modified Chases** can be added to the Memory Stack
- ▶ **True 'Sound to Light'**
Sound from any music source is divided into four frequency bands. Each band drives a special cue which varies in intensity with the volume. The four cues create a complex dynamic scene, particularly useful where a 'Disco' type of effect is required.

AUTOFADE

- ▶ **Dipless Crossfade**
Any cue in the Memory Stack may have its own dipless programmed rise and fade time cue.
- ▶ **Manual Fade Override**
Crossfade times may be manually overridden to give a live feel on replay or to get out of trouble in an emergency.

INSERT

- ▶ **Add another memory between cues**
Up to 90 additional memories may be inserted; they are identified by the addition of a decimal point; up to 9 Inserts are associated with any cue

OUTPUTS

Sirius is supplied with a 25 way 'D' connector as standard. Various options such as Socapex, Bleecon, DIN and XLR7 offer a choice of output socket. The optional, internally fitted, desk to supply a negative output or a simultaneous '+', and '-' output at the same voltage.

LINKING SIRIUS

Two standard Sirius may be linked together using an 8 way DIN cable in a true master-slave configuration.

CLIC TRAC

In the Audio Visual Industry a tone on a tape track is used to initiate an external event such as a slide change. Special A.V. tape machines have either an audio output or a switch contact (or both). Sirius has been designed to work with either.

SPECIFICATION DETAILS

- ▶ 48 Channels
- ▶ 2 Presets
- ▶ 99 Programmable Level Memories
- ▶ 9 Level Chases
- ▶ 90 'Insert' Level Memories
- ▶ 200 'Insert' Level Chases
- ▶ 398 Total Cues Available
- ▶ Keyswitch for restricted use of console
- ▶ Timed Crossfades in Memory
- ▶ Multiple Chases
- ▶ 6 Memory Masters
- ▶ Full Preview and Blind Editing
- ▶ 32 kb Memory Card
- ▶ Top Set control
- ▶ Clic-Trac
- ▶ True Frequency Modulated 'Sound to Light' Linkable



- ▶ LED Indication of Cue Number
- ▶ Multiple Output Option
- ▶ Negative Output Option
- ▶ 'GO' Button (the single action memory playback)
- ▶ Level Match
- ▶ Dipless Crossfade
- ▶ Flash/Solo facility

FUNCTIONAL DETAILS

The Keyswitch allows restricted use of the console. Presets Only or Run Only, allowing a wide variety of users with varying levels of competence.

Memories are programmed on Preset B. Each action of the 'GO' button initiates a sequential playback from the 'stack' of programmed memories, including programmed fade up and down times. Chases may be inserted into the memory 'stack' facilitating a full operating sequence from memory.

Memories and Chases at different speeds may be played back on the 6 Manual Masters. If required, the presets, chaser, Manual Masters and the 'GO' button may be used simultaneously. Any memory or chase may be programmed and edited 'blind'. Any memory or chase may be previewed at any time — even whilst in 'live' operation. A 'Superuser' facility allows access to memory

and chase 'clearout', as well as Clic Trac and Memory Card operation. To aid the user there is a full LED indication of all channel and memory information.

Two standard Sirius may be simply and economically linked using a standard 8 way DIN cable (Part No. 298).

TECHNICAL SPECIFICATION

- Standard Outputs (Internally Selectable)**
 - 0 to + 5 volts or +10 volts or +15 volts
- Optional Outputs**
 - Internally fitted Negative Output Kit supplies a negative output or a simultaneous + and - output at the same voltage

Power Supply (Internally Selectable)
200 to 260 volts
100 to 130 volts
50 or 60 Hz

Audio Input
Stereo: greater than 30mV; input impedance 22k

Size
610 x 1070 x 120mm (max)
(24 x 42 x 4 3/4")

Weight
23.5 Kg (52 lbs)

Superuser Selectable
Clear All.
Dipless A and B presets crossfade.
Flash button operation. Flash to level or override
Clic Trac

Clic Trac
100 — 150 Hz Audio Input

COMPLEMENTARY PRODUCTS

BETAPACK

A range of 4U high rack/wall/freestanding 6 channel x 10 amp dimmer packs which offer a wide and comprehensive selection of output socket options.

BETAPACK plus

A range of 4U high rack/wall/freestanding 6 channel x 10 amp dimmer packs with a selection of output socket options and Local Control using six channel faders and a master.

RACKMASTER 260

Is a 6 channel x 10 amp high density dimmer pack built to the highest specifications. The high density pack is designed to use as little space as possible and Zero 88 have engineered a full 60 amp dimmer into an incredible 2U (3.5"/88mm) high, fan cooled box.

ECLIPSE

The modular 2 preset memory console from 24 - 120 channels.

LIGHTMASTER 1200

12 channel x 2 preset desk with 15 Step Memory, Individual Channel Flashers, Timed Crossfade, Bass Chase.

SIRIUS 24

Is a 24 channel, 2 preset lighting console with 398 available level cues, 9 programmable level chases with sound to light, timed crossfades in memory and a 'GO' button - the single action, memory sequence playback.

AVAILABLE OPTIONS & ACCESSORIES

- Sik No. 291:** Negative Output Kit (2 required)
- 292:** Memory Card
- 293:** Gooseneck Light
- 303:** 8 way Bleecorn Output Kit
- 304:** Socapex Output Kit
- 305:** XLR7 Output Kit
- 306:** 8 pin ring locking DIN Output Kit
- 298:** 1m 8 way Cable for linking Desks
- 289:** Flight Case for Sirius 48 and MCU
- 140:** Mains Conditioning Unit (MCU)

ZERO 88
A Touch of Brilliance

Zero 88 Lighting Ltd
Usk House, Llantarnam Park,
Cwmbran, Gwent NP44 3HD, UK
Tel +44 (0)1633 838088
Fax +44 (0)1633 867880