

### Features

- 12 Channels
- 10 Amps per channel
- Easy wall installation
- 100% duty cycle
- DMX & ChilliNet control inputs
- 4 dimmer laws selectable per channel
- User defined back up memory
- Preheat per Channel
- Topset per Channel
- DMX Addressing per Channel
- RDM Enabled
- Automatic frequency tracking
- MCB per channel
- Optional incoming supply RCD protection
- Simple User Interface
- Variable level channel test
- Built in, switchable, DMX line termination
- Common service applications need only a screwdriver
- Convection Cooling

### ChilliNet

- 12 memories per area
- 3 sequences
- 10 areas available



### Overview

The Chilli 1210i dimmer has 12 channels each rated at 10 Amps.

Chilli is a range of high density wall mounted convection cooled dimming. Quick to install and set up, easy to operate and maintain; Chilli dimmers are the workhorses of any hard working professional venue.

Chilli Inductive Dimmers are available in 4, 6, 12 and 24 channel dimming packages featuring 10, 16 and 25 Amp load capacities with optional RCD protection contained in a slim line wall mounting enclosure.

The 18 button user interface and backlit LCD screen on each dimmer ensure simple convenient set up for DMX patching, preheat, topset and dimmer curves and for peace of mind, the user interface and all breakers are also protected by a lockable breaker cover.

A choice of responses to DMX failure, backup memories, built in chases and an alarm input trigger complete the versatile Chilli dimming package.

TUNGSTEN MCBs RCD OPTION CONVECTION COOLED INSTALL RDM LOCAL CONTROL

### Quality you can trust

### 40 Years of Lighting Passion

- |                           |                              |                              |
|---------------------------|------------------------------|------------------------------|
| ✓ 3 years warranty        | ✓ Real people to help you    | ✓ Multilingual training team |
| ✓ On-line training videos | ✓ Downloadable web resources | ✓ Support forum              |
| ✓ Free software upgrades  | ✓ ISO 9001:2008 Certified    |                              |

## Ordering Information

Chilli 1210i: 01-101-00  
Chilli 1210i + RCD: 01-111-00


## Supplied Accessories

Installation / Operating instruction

## Specifications

- Number of channels: 12
- DMX Address: Addressable per channel
- Channel Capacity: 0.1A min /10A max
- Total dimmer capacity: 120 Amp / 40 Amps per phase
- Dimmer duty cycle: 100%
- Dimmer curves: Normal, Linear, Switched and Square
- Memories: 12
- Sequences: 3
- Areas/zones: 10
- Topset: Selectable per channel
- Supply voltage: 200-255V (3 phase supply)
- Operates on three phase. Can be modified for single phase use by a special order kit. Contact Zero 88 for more information.
- Supply frequency: 45 to 70Hz auto-sensing and auto-tracking
- Rise Time: 80uS
- Control Input:
  - DMX via terminal block accepts DMX 512-1990. Start address set via front panel controls
  - DMX termination may be switched in or out internally
- ChilliNet Support
- RDM Enabled
- Channel outlets: Outlet connections via 6mm<sup>2</sup> terminal strip
- Case has the following knockouts: Top 1 x Ø28.5mm, 4 x Ø22.5mm, 4 x Ø25.5mm. Bottom 1 x Ø25.5mm, 1 x Ø22.5mm
- Channel protection: 10A, type C, single pole magnetic circuit breaker per channel, breaking capacity 6000A
- Cooling: Convection
- RCD option also available
- Dimensions: 850mm(H), 325mm(W), 155mm(D)
- Weight: 20Kg (44lb)
- Operating Temperature: +5°C to +40°C
- Humidity: 5% to 95% Non condensing

## Dimensions

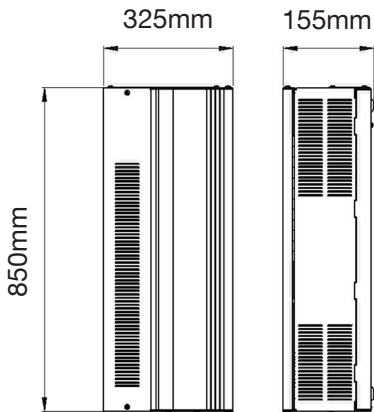

	Voltage	100V	<input type="checkbox"/>	220 - 240V NON CE	<input checked="" type="checkbox"/>	Standards 
		110 - 127V	<input type="checkbox"/>	277V	<input type="checkbox"/>	
		230V CE	<input checked="" type="checkbox"/>	347V	<input type="checkbox"/>	

This product conforms to one or more of the above standards. Please contact your local Cooper Controls representative for further information.

## Zero 88

Cooper Controls Ltd, Usk House, Lakeside,  
Llantarnam Park, Cwmbran, Torfaen, NP44 3HD, UK.  
Tel : +44 (0)1633 838088 Fax : +44 (0)1633 867880  
E-mail: enquiries@zero88.com Web: www.zero88.com