

Features

- 48 Channel Memory Lighting Console with Moving Light Support
- Playback stack
- Patching to 512 DMX channels
- DMX in allowing snapshots of all 512 DMX channels
- VGA Monitor Port
- USB storage and keyboard support
- MIDI Notes & Show Control
- Lock Function
- LCD Display for stand-alone use
- Online Help in multiple languages
- Offline Editor (Phantom Jester)
- Remote triggers
- RDM enabled
- Upgradeable firmware
- External power supply
- 30 Fixtures
- 24/48 channels of control
- 24 x 48 Submasters
- 30 each of Colour, Position and Beamshape Palettes
- Fixture Library with over 3100 types
- Moving light effects system



Overview

The Jester ML48 brings greater control and flexibility to mixed lighting applications using up to 30 moving lights and 48 dimmer channels. Featuring an effects system, recorded palettes, and an extensive library of fixture personalities, the Jester ML48 is an ideal choice for rental or mid sized venues with mixed lighting needs.

The Jester ML48 also offers direct control of up to 48 dimmer channels. Show playback is either via submasters or through a traditional theatrical cue stack.

Choose from preset, program or playback mode, add effects, and conventional fader control to tailor the way you operate your moving lights, colour changers and dimming to deliver exactly what you need, show after show.

*Monitor not included

RDM MIDI USB Monitor

Quality you can trust

40 Years of Lighting Passion

- | | | |
|---------------------------|------------------------------|------------------------------|
| ✓ 3 years warranty | ✓ Real people to help you | ✓ Multilingual training team |
| ✓ On-line training videos | ✓ Downloadable web resources | ✓ Support forum |
| ✓ Free software upgrades | ✓ ISO 9001:2008 Certified | |

Ordering Information

Jester ML 48: 00-123-00
Flightcase Jester ML48: 00-768-00


Supplied Accessories

Power Supply
Operating Manual (on CD)

Specifications

- Control Channels: Up to 512
- Channel Faders: 48
- Fixture select buttons: 3 pages of 10
- Preset Master Faders: 2
- Sequence Master Fader: 1
- Grand Master Fader: 1
- Blackout Button: 1
- Flash Buttons: 48
- Midi In/Thru
- VGA Monitor Port
- Audio Input
- Remote Input
- Storage and Keyboard Connections ● RDM Enabled
- Power Supply: External 100-240 Volts 50/60Hz
- DMX Output: 1 Universe
- DMX Input: 1 Universe
- DMX to USITT DMX512-A
- Dimensions: 90mm(H) x 970mm(W) x 278mm(D)
- Weight: 8.5Kg
- Operating Temperature: +5°C to +40°C
- Humidity: 5% to 95% Non condensing

Dimensions

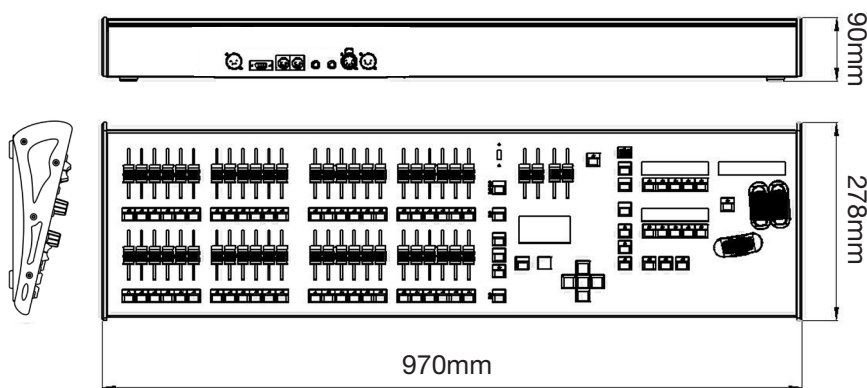

	Voltage	100V <input checked="" type="checkbox"/>	220 - 240V NON CE <input checked="" type="checkbox"/>	Standards 					
		110 - 127V <input checked="" type="checkbox"/>	277V <input type="checkbox"/>						
		230V CE <input checked="" type="checkbox"/>	347V <input type="checkbox"/>						

This product conforms to one or more of the above standards. Please contact your local Cooper Controls representative for further information.

Zero 88

Cooper Controls Ltd, Usk House, Lakeside,
Llantarnam Park, Cwmbarn, Torfaen, NP44 3HD, UK.
Tel : +44 (0)1633 838088 Fax : +44 (0)1633 867880
E-mail: enquiries@zero88.com Web: www.zero88.com