

## Features

- Ethernet to 8 universes of DMX
- Configuration via Web Browser
- Optional configuration from ZerOS consoles
- Grounded DMX outputs
- Fully RDM compatible
- Desk Mount or 19" Rack Mount Form Factor
- Integral 90-250V AC Power supply
- Dimensions: 1RU (H) x 19" Rack (W) x 257mm (D)
- Weight: 2.8Kg / 5.2lb



## Overview

EtherN.8 RDM from Cooper Controls offers flexible Ethernet to DMX/RDM data conversion in a 19" format. Up to 8 universes of Art-Net DMX/RDM data can be output from the EtherN.8 RDM to your lighting system. The unit is configured through an internal web server or via optional control software. Simplicity is key to the EtherN.8 RDM.

The EtherN.8 RDM is fully compatible with the latest RDM protocol, ensuring your DMX distribution network is ready to meet your future demands. The slim 19" enclosure makes it ideal for combining with the Split2.8 RDM to build a larger data distribution system. When combined with any ZerOS family console, the EtherN.8 RDM provides on-board configuration from the console, for a truly integrated system.

Whatever your lighting system, the EtherN.8 RDM simplifies data distribution.

### Quality you can trust

✓ 3 years warranty

✓ On-line training videos

✓ Free software upgrades

✓ Real people to help you

✓ Downloadable web resources

✓ ISO 9001:2008 Certified

### 40 Years of Lighting Passion

✓ Multilingual training team

✓ Support forum

## Mechanical

- Housing: 19" 1U Rack Enclosure
- Material: Metal
- Overall Dimensions: 1RU (H) x 19" Rack (W) x 257mm (D)
- Mass: 2.8kg
- Mounting: Desktop or 19" Rack Mounting (with supplied rack ears)

## Control

- 8 Universes (output)
- Input Protocols: Art-Net II
- Input Connector: RJ45 (Ethercon)
- Output Protocols:
  - DMX512-A
  - RDM V1.0 (E1.20 - 2006 ESTA Standard)
- Output Connector: 5pin Female XLR
- Configuration
  - Universe, Sub-Net, Config (Art-Net)
  - DMX Output Specification (via Web Browser)
  - Ethernet IP Address

## Electrical

- Input Voltage: 90-250V AC
- Input Connector: IEC C13 Male
- Input Power (max): 30W
- Duty Cycle: 80% @ 25°C
- Mains Earthing: Case connected to Mains Earth
- Mains Fuse: 3.15A Slow Blow

## Isolation

- External Ethernet port Isolated to 1kV
- DMX Output - Ground Referenced

## Protection

- Mains 3.15A Slow Blow Fuse
- Internal Resettable Fuse - Control Electronics

## Environmental

- Operating Temperature: 0°C to 40°C
- Storage Temperature: -10°C to +50°C
- Operating Relative Humidity (max): 80% Non Condensing
- IP Rating: IP20 Indoor Use Only
- Certification: CE, FCC, WEEE, RoHS

## Package Contents

- EtherN.8 RDM
- User Guide
- IEC C13 to Bare Ends Mains Lead
- Rack ears
- Jumpers (for configuration pins)

## Connections

- 2 x RJ45 Ethercon Art-Net
- 1 x IEC C13 Male Mains Input
- 8 x 5pin Female XLR DMX Output

## User Interface

- Web-Browser / DMX-Workshop
- Configuration: Jumpers / Switches
- Sub-Net, RDM Disable, IP Address
- ROM Boot, Factory Reset


## Indication

- Power / Ethernet Link / Activity / Speed
- Art-Net Activity / DMX Transmitted

## Ordering Information

Catalogue Number: ETHERN8RDM

## Dimensions

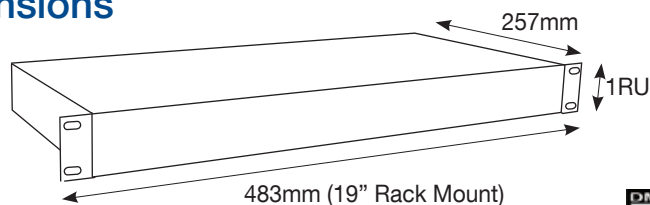

	Voltage	100V	<input type="checkbox"/>	220 - 240V NON CE	<input type="checkbox"/>	<b>Standards</b> 
		110 - 127V	<input type="checkbox"/>	277V	<input type="checkbox"/>	
		230V CE	<input checked="" type="checkbox"/>	347V	<input type="checkbox"/>	

This product conforms to one or more of the above standards. Please contact your local Cooper Controls representative for further information.

### Zero 88

Cooper Controls Ltd, Usk House, Lakeside,  
Llantarnam Park, Cwmbran, Torfaen, NP44 3HD, UK.  
Tel : +44 (0)1633 838088 Fax : +44 (0)1633 867880  
E-mail: enquiries@zero88.com Web: www.zero88.com