

# Lighting Consoles

# **Jester ML24**

### 24 Channel Moving Light Console

#### **Features**

- 24 Channel Memory Lighting Control with Moving Light Support
- Playback stack
- Patching to 512 DMX channels
- DMX in allowing snapshots of all 512 DMX channels
- VGA Monitor Port
- USB storage and keyboard support
- MIDI Notes & Show Control
- Lock Function
- LCD Display for stand-alone use
- Online Help in multiple languages
- Offline Editor (Phantom Jester)
- Remote triggers
- RDM enabled
- Upgradeable firmware
- External power supply
- 30 Fixtures
- 12/24 channels of control
- 12 x 24 Submasters
- 30 each of Colour, Position and Beamshape Palettes
- Fixture Library with almost 3100 types
- Moving light effects system



#### Overview

The Jester ML24 is a powerful performer across rock, theatre and corporate lighting presentations. The console offers users a cost effective solution for control of up to 30 moving lights and 24 dimmer channels. Featuring an effects system, recorded pallets, and an extensive library of fixture personalities, the Jester ML24 is an ideal choice for mixed lighting venues.

The Jester ML24 also offers additional direct control of 24 dimmer channels. Show playback is either via the submasters or through a traditional theatrical cue stack.

The three operating modes feature control in preset, program or playback including using a traditional theatre playback stack. So whether you are using moving lights, colour changers, effects or conventional dimming, alone or in combination, the Jester ML24 delivers.

\*Monitor not included



### Quality you can trust

40 Years of Lighting Passion

- Real people to help you
- Multilingual training teamSupport forum

- On-line training videosFree software upgrades
- ✓ Downloadable web resources
- ✓ ISO 9001:2008 Certified





### Lighting Consoles

# **Jester ML24**

### 24 Channel Moving Light Console

### **Ordering Information**

Jester ML24: 00-114-00

00-767-00 Flightcase:


### **Supplied Accessories**

**Power Supply** Operating Manual (on CD)

### **Specifications**

- Control Channels: Up to 512
- Channel Faders: 24
- Fixture select buttons: 3 pages of 10
- Preset Master Faders: 2
- Sequence Master Fader: 1
- Grand Master Fader: 1
- Blackout Button: 1
- Flash Buttons: 24
- Midi In/Thru
- VGA Monitor Port
- **Audio Input**
- Remote Input
- Storage and Keyboard Connections
- Power Supply: External 100-240 Volts 50/60Hz
- DMX Output: 1 Universe
- DMX Input: 1 Universe
- DMX to USITT DMX512-A
- RDM Enabled
- Dimensions: 90mm(H) x 710mm(W) x 278mm(D)
- Weight: 6.5Kg (14.3lb)
- Operating environment: +5°C to +40°C
- Humidity: 5% to 95% Non condensing

### **Dimensions**

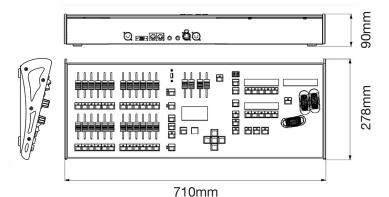



Voltage

100V 110 - 127V 🗹

230V CE

220 - 240V NON CE

277V

347V



Standards 











This product conforms to one or more of the above standards. Please contact your local Cooper Controls representative for further information.

Zero 88

Cooper Controls Ltd, Usk House, Lakeside, Llantarnam Park, Cwmbran, Torfaen, NP44 3HD, UK. Tel: +44 (0)1633 838088 Fax: +44 (0)1633 867880 Web: www.zero88.com E-mail: enquiries@zero88.com

